

Vigo Presses®

Instructions for use of the Classic Crusher


Suitable for use with a 12, 20 or 36 litre Cross Beam Press.

In the absence of a cross beam press, the crusher can be mounted over a bucket or supported on a wooden frame.

Stock Code: 91101

These instructions are for the safe use and maintenance of the Classic Crusher. Do not use the machine if you have not read and understood every part of this instruction sheet. Children must be supervised at all times by an adult when using this equipment.

WARNING! SHARP CUTTING BLADES. HANDS SHOULD NOT COME INTO CONTACT WITH THE CUTTING BLADES. USE A NYLON BRUSH WHEN CLEANING.

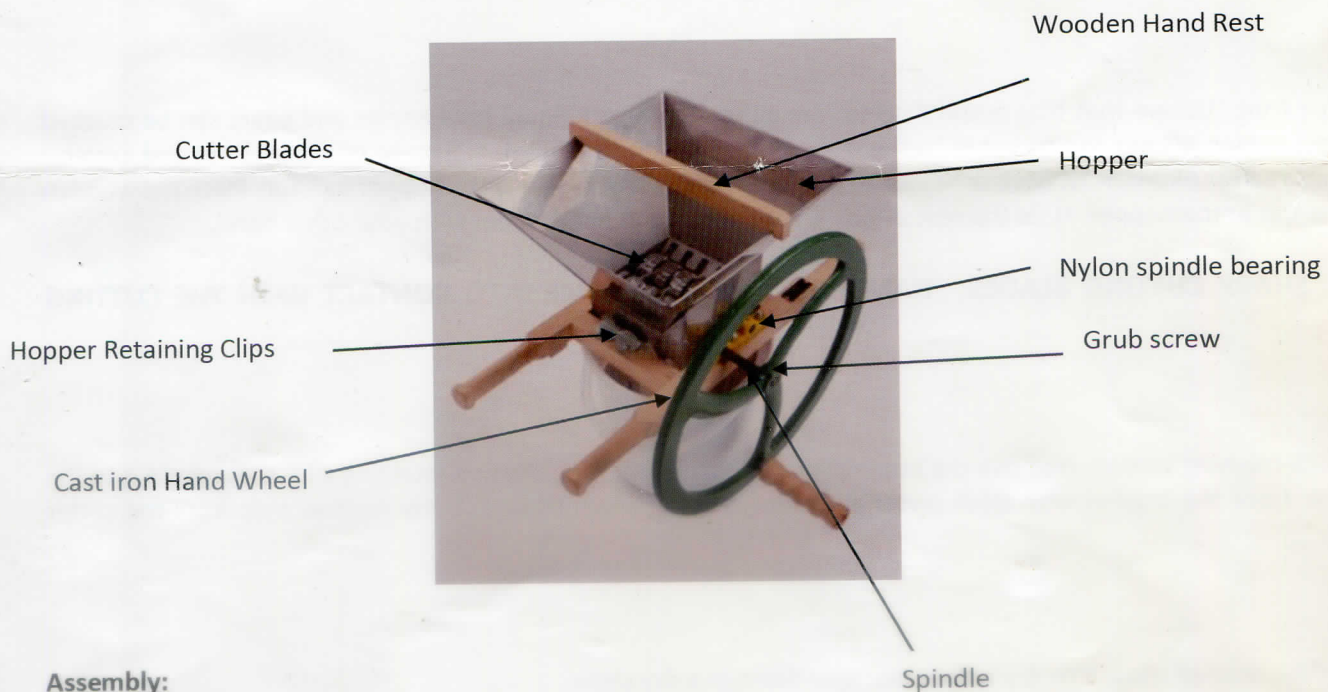

Assembly:

Align the hole in the spindle with the grub screw in the hand wheel hub and slide the wheel onto the spindle. The wheel is designed to be a tight fit on the spindle and may also require gentle tapping with a rubber or wooden mallet; do not use a metal hammer (however if you must use a hammer, place a piece of wood against the wheel to soften the blow and avoid damage to the paint). Tighten the grub screw using the Allen key (*see photos overleaf*), ensuring that the screw has engaged with the hole in the spindle. When the grub screw is fully engaged with the hole in the spindle the top of the screw will be flush with the hub.